


# PCI Express PCE-C122T

## 2-port Isolated CAN Bus Card

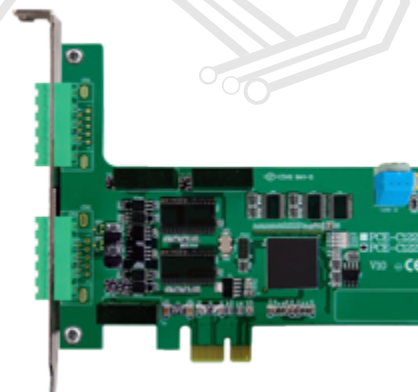

### Features

- PCI Express x1 compliant
- CAN 2.0 A,B Protocol
- Two independent CAN communication operation
- Direct memory mapping to the CAN controllers
- Up to 1 Mbit/s programmable transfer rate on each port
- 120 ohm termination resistor selected by jumper

### Pin Definition

#### PCE-C122T

01	CAN-GND
02	CAN-L
03	
04	CAN-H
05	

### Specification

#### CAN

Number of port	2
CAN controller	SJA1000
Protocol	CAN 2.0 A,B
Speed	1Mbps
Signal support	CAN_H, CAN_L, GND
Isolation voltage	3750Vrms
Termination resistor	120 ohm selected by jumper
Connectors	5 pin TB

#### General

Specifications	1-lane 2.5 Gb/s PCI Express
Power consumption	3.3VDC at 100mA, 12VDC at 100mA typical
Working temperature	0 to 60°C

### Ordering information

- **PCE-C122T**  
2-port Isolated CAN Card with 5-pin Terminal Block

### Software Supporting

- **Windows 2000/XP/7 WDM driver**  
Support Visual C/C++, C#, Microsoft .NET Framework programming on Windows 2000/XP/7 platform with DLL
- **DeviceNet DLL supported by request**